

TRACKER™ Positive Mud Pulse MWD System

SANVEAN®
TECHNOLOGIES
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.

SDI
SCOUT DOWNHOLE™
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.

SDI
SCOUT DRILLING
TECHNOLOGIES
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.



CANAMERA
CORING
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.


The TRACKER MWD tool from Scout Drilling Technologies offers some of the fastest surveys available with data transfer rates of up to 2 bits per second. It includes real-time shock, vibration, stick-slip and natural gamma ray.

The tool can be down-linked while downhole using flow or RPM commands, providing flexibility for unforeseen events while drilling. It is also capable of dynamic sequencing whereby different data can be provided while sliding and rotating.

The continuous inclination and azimuth measurements are second to none, thus providing early warning for directional corrections.

Features:

- Rated to 330°F (165°C)
- Flow rates of 125 gpm - 1200 gpm
- 40 lbs/bbl LCM capability (with proper mixing)
- Top and bottom mount pulser options
- Long-life batteries (+400 hours)
- 392°F tool interconnects
- Memory for diagnostics to help determine root cause of downhole incidents
- Continuous inclination and azimuth
- Realtime vibration, shock and stick-slip
- Flow or RPM downlink
- Rotation/sliding modes

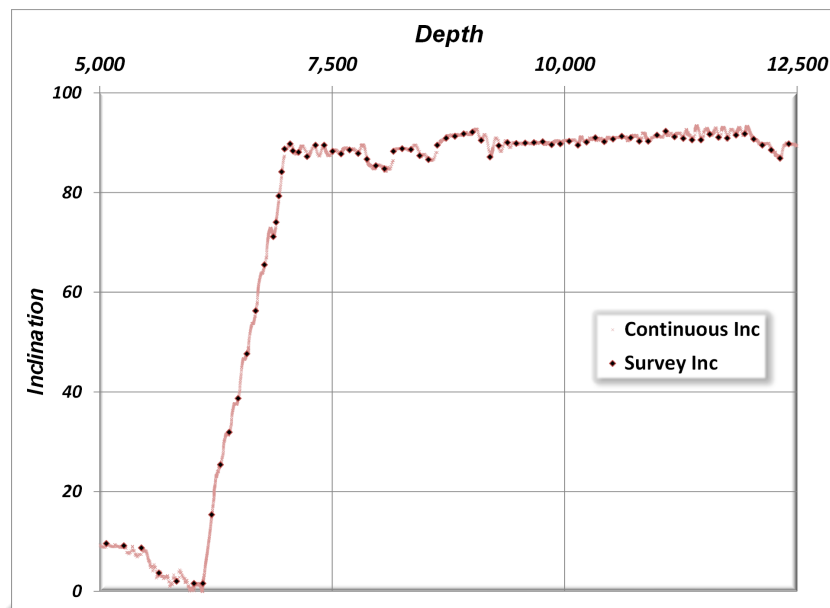

TRACKER™ MWD



TRACKER™ Positive Mud Pulse MWD System

SANVEAN®
TECHNOLOGIES
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.



SDI
SCOUT DOWNHOLE™
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.

SDT
SCOUT DRILLING
TECHNOLOGIES
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.

CANAMERA
CORING
A BUSINESS UNIT OF TURBO DRILL INDUSTRIES, INC.

TECHNICAL SPECIFICATIONS

TRACKER MWD		
Special Features:	<ul style="list-style-type: none"> • Continuous Inclination and Azimuth • Flow or RPM Downlink capability • Drilling Mechanics (shock/vibration/stick-slip) 	
Sensor Specification		
Toolface	Accuracy	±1°
Inclination	Accuracy	±0.1°
	Spread @ 90° Inc	±0.2°
Azimuth	Accuracy	±0.5°
	Spread @ 90° Inc	±0.5°
	Spread @ 10° Inc	±1.0°
	Spread @ 5° Inc	±2.0°
Dip Angle	Spread	±0.5°
Total Gravity Field	Spread	±3 mG
Total Magnetic Field	Spread	±1%
Temperature	Operating: Max 330° F (165° C)	
Vibration	Random: 20 GRMS, 10 Hz-500 Hz (axial and lateral)	
Shock (1 mSec, half sine)	Operating: 500G's (axial and lateral)	
Pressure	20k psi	
LCM Limitations (high LCM option available)	Medium Nut Plug, 40 lbs/bbl (85.6 kg/m³)	
Telemetry	Positive Pulse	
Mechanical Specifications - deg/100ft (deg/30m)		
	Rotating	Sliding
4-3/4" (121 mm)	17	31
6-1/2" (165 mm)	10	20
6-3/4" (172 mm)	10	18
8" (203 mm)	7	12



TRACKER™ MWD

